


FTTH-006 Optical Fiber Panel Specification

The FTTH-006 is a desk mounted or wall mounted termination box for end user, indoor use, capable to handle fiber fusion, fiber cables and pigtails.

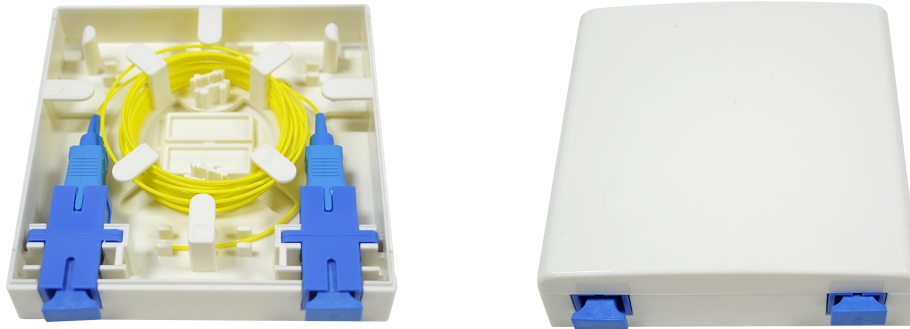

.Features & Benefits

- 1.Support termination, splicing and storage for fiber optic cable systems.
- 2.Compact structure and perfect fiber management.
- 3.Engineered fiber routing protect bend radius through the unit to ensure signal integrity.
- 4.Applicable for desk-mount or wall-mounted and compatible with flush-mount outlet.
- 5.Working Temperature: -25°C~+60°C; Atmospheric
- 6.Pressure: 70kPa~106kPa;
- 7.Relative Humidity: ≤ 85% (+30°C) ;
- 8.Connector Repeatability: >1000;
9. Connector Specification: IL: ≤0.2dB; RL: ≥50dB;

.Specifications

| Parameter | Value | Remark |
|------------------------|-------------------------|---------------------|
| Model | FTTH-006 | |
| Outside Dimension (mm) | 86*86*25 | |
| Material | ABS | |
| Color | White | |
| Storage of fibers | G.657 | |
| Splice capacity | 2fiber | |
| Splice Method | Fusion Splice | 45mm sleeve |
| Adapter type and count | 2 SC/SX or 2 LC/DX | |
| Input cable | 3mm or figure 8 (2*3mm) | From side or bottom |

.Accessories

| No. | Name | Qty. |
|-----|---|-------|
| 1 | Fiber splice protection sleeve | 2pcs |
| 2 | Expansion bolts for the outlet wall-mounted | 2 set |

